CROWN

USER MANUAL

CLIENT CHAIR

PB-3223

All rights reserved.
Printed in Canada

ASSEMBLY INSTRUCTIONS

Step 1: Push the 5 casters (4) into the base (3).

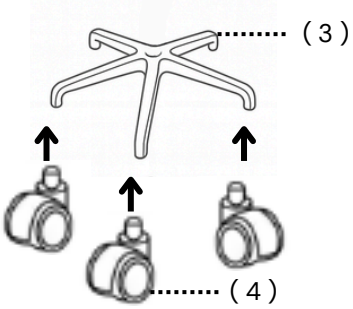

Step 2: Insert the gas lift (5) into the base.



Step 3: Place the seat (1) onto the gas lift.



Step 4: Attach the left arm (2) with the bolts (6); tighten.

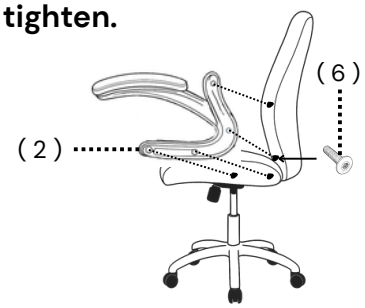

Step 5:Attach the right arm in the same way and fit the caps/bolts (8); tighten.



Step 6: Sit to lock the taper, then test height and tilt—the chair is ready.

(1)	(2) x2	(3) 	(4) x5
(5)	(6) x6	(7)	(8) x6
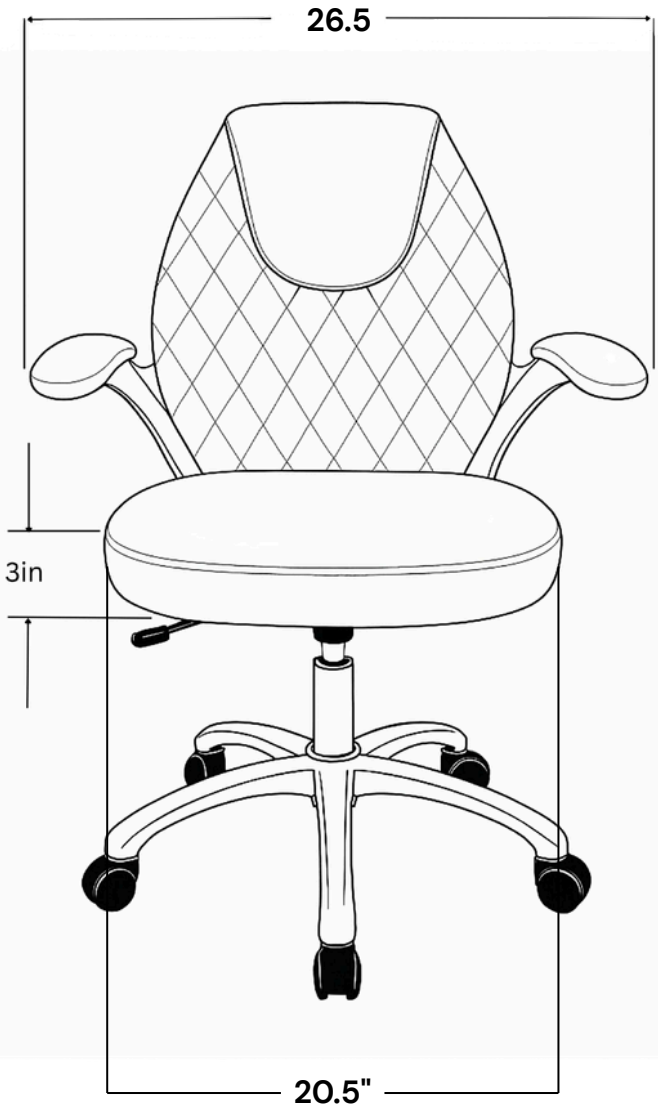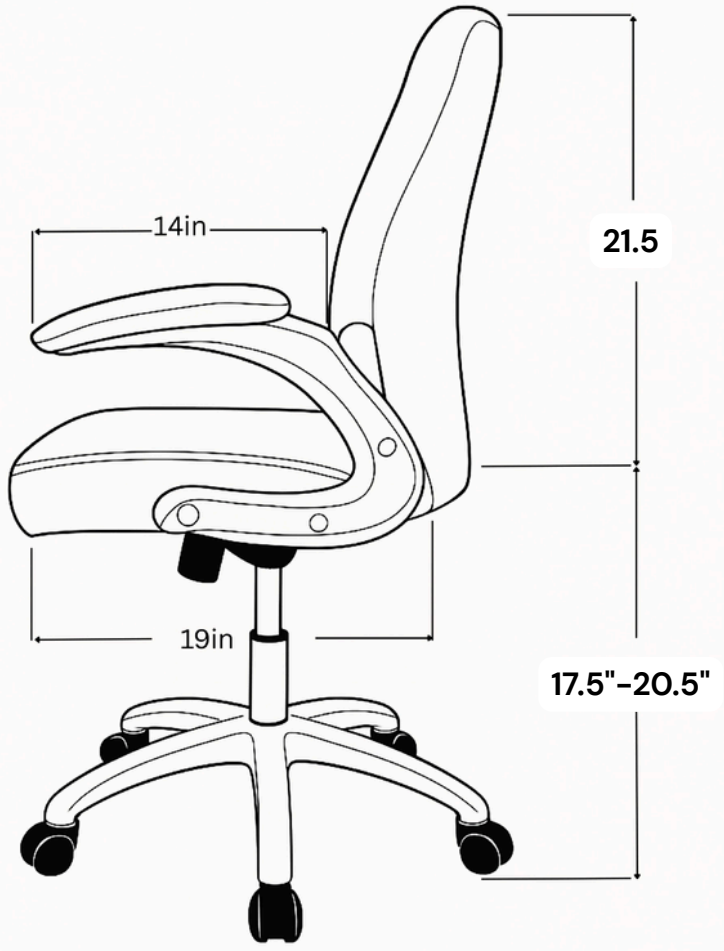
PRODUCT DIMENSION